


SPECIFICATIONS

- ★ Product name: LED Canopy Light (200W)
- ★ UPC Code: 0103494408425
- ★ L70>36000 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ Photo-electric Switch (Optional) – Listed (WJCT),
- ★ ETL Listed
- ★ System Watts: 200W
- ★ Voltages: 100-277Vac
- ★ CRI:70+
- ★ Operating Temp: -22 °F to +122 °F
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 3000-5700K

- 200W Canopy Light
- 23800 lm
- 119 lm/W

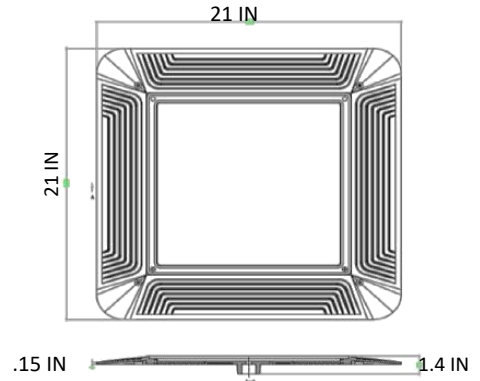

Order Information

M/N	Watts	Lumen Efficiency	Operation Volt.	CCT	Beam Angle	Replace HID/MH
SES-CP-200W-G-LV-N-WW	200W	119.27lm/w	100-277Vac	3000K	107.1°	700W
SES-CP-200W-G-LV-N-NW	200W	119.27lm/w	100-277Vac	4100K	107.1°	700W
SES-CP-200W-G-LV-N-DW	200W	119.27lm/w	100-277Vac	5000K	107.1°	700W
SES-CP-200W-G-LV-N-CW	200W	119.27lm/w	100-277Vac	5700K	107.1°	700W

Beam Spread (at 100 ft) (100 ft)

3M	129.1	469.5cm
4M	72.6	626cm
5M	46.5	782.5cm
6M	32.3	939cm
7M	23.7	1095.5cm

Om

.m

AVERAGE BEAM ANGLE (50°H); 84.9 DEO