


# LED CIRCULAR AREA LIGHT (75W)

## SPECIFICATIONS

- ★ L70>54000 Hours
- ★ Commercial/Architectural Grade
- ★ Architectural UV resistant powder coat finish
- ★ Lighting Facts™ Uniform LM-79 Reporting Template
- ★ Photo-electric Switch (Optional) – Listed (WJCT),
- ★ Dimmable: 1-10VDC/PWM/Resister (3 in 1)
- ★ ETL Listed
- ★ System Watts: 75W
- ★ Voltages: 100-277Vac
- ★ CRI:70+
- ★ Operating Temp: -30 °C to +50 °C
- ★ Operating Humidity: 20% to 90%RH
- ★ Power Fact(PF) : 0.99
- ★ Power Supply Efficiency: > 90%
- ★ Color Temperature: 3000-6000K



## Dimension

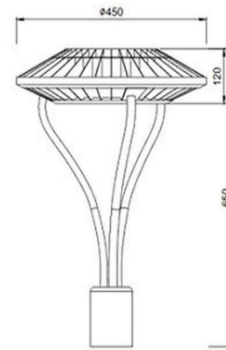

UNIT: mm

## ORDERING INFORMATION

M/N	Watts	Lumen Efficiency	Operation Volt.	CCT	Beam Angle	Replace HID/MH
SES-AL-075W-V-LV-D-WW	75W	105.2 lm/w	100-277Vac	3000K	121.9°	175W~200W
SES-AL-075W-V-LV-D-NW	75W	105.2 lm/w	100-277Vac	4100K	121.9°	175W~200W
SES-AL-075W-V-LV-D-DW	75W	113.29lm/w	100-277Vac	5000K	121.9°	175W~200W