



NAME: LED High Bay Light



P/N : SES-HB02-240WD1

Advantage:

cUL UL DLC certificate
 Mean Well IP65 driver,
 Input voltage 100-277Vac No
 UV or IR in the beam Easy to
 install and operate Energy
 saving, long lifespan
 Instant start, NO flickering, NO humming
 Green and eco-friendly without mercury
 Output constant current lever can be
 adjusted through output cable with 1-10V.

Application:

- ◆ Warehouse, factory and workshops;
- ◆ Highway toll station and gas station;
- ◆ Exhibition hall;
- ◆ Gymnasium and supermarkets, etc.

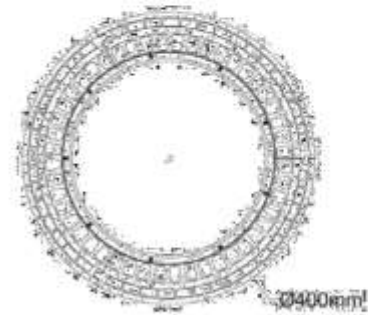

Product Specifications

Product name	LED High Bay Light
Part No	SES-HB02-240WD1
Dimension	∅ 400 x 200 mm or ∅ 400 x 225 mm

Technical Characteristic

Color temperature	4000K	5000K	5700K
CRI	>80		
Lumen	30000 - 31500LM		
Input Power	240W		
Viewing Angle	120°		
Input Voltage	100-277Vac	50/60Hz	
Driver model	HBG-240-60B (Mean Well Driver)		
PFC	>0.9		
Waterproof Rating	WET (IP65)		

Materials



LED Brand	PHILIPS LUMILEDS
LED Type	LUXEON 3030 2D (1.5W)
LED QTY	360 PCS
Housing	Aluminum
Housing color	Black
Cover	Tempered Glass

Others

Operating Temperature	-20°C TO 40°C
Operating Humidity	20%-90% RH
Storage Temperature	-30°C TO 80°C
Storage Humidity	10%-95%
Application	Indoor / Outdoor
Safety Certification	UL、cUL、DLC
Warranty	5 Years Limited

Light Distribution Testing Parameters


DATA OF LAMP		PHOTOMETRIC DATA Eff: 131.42 lm/W			
MODEL		I _{max} (cd)	10651	S/MH (C0/180)	1.31
NOMINAL POWER (W)	240	LOR (%)	100.0	S/MH (C90/270)	1.27
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	30370	η UP, DN (C0-180)	0.0, 52.5
NOMINAL FLUX (lm)	30369.7	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 47.5
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

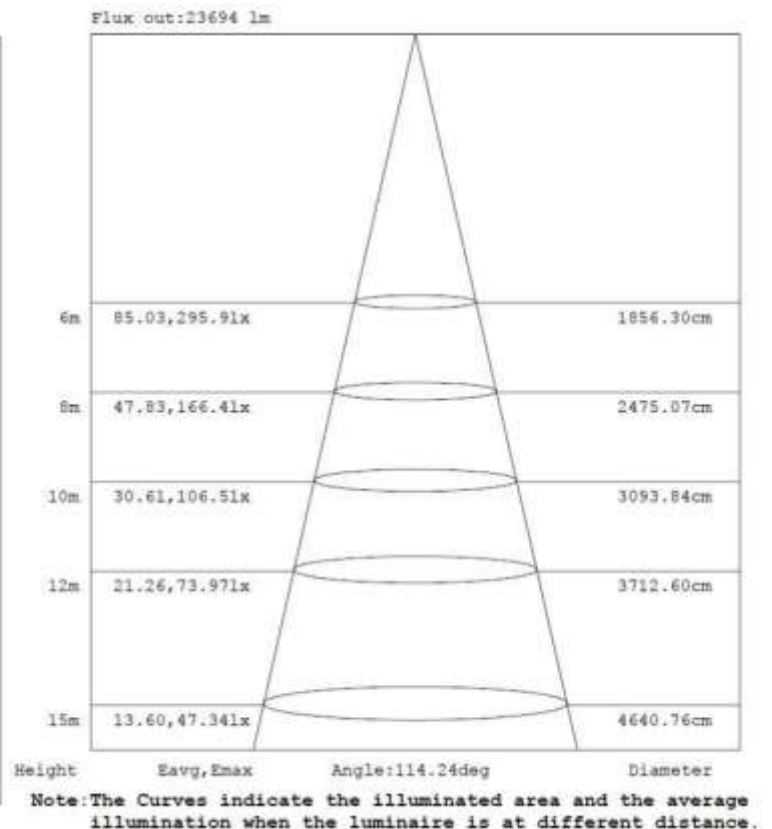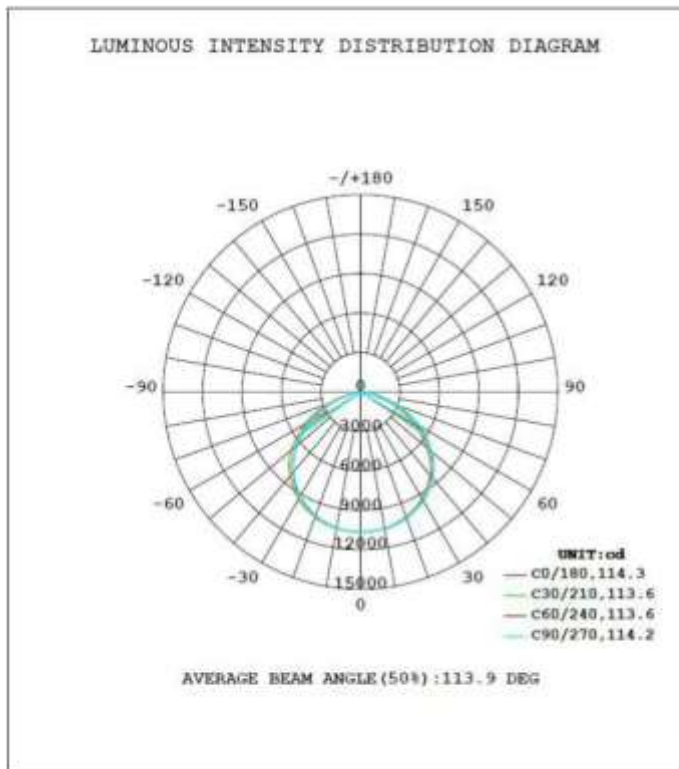

Package

Lamps Net Weight: 7.6 kg / pc

	Size	Qty/Carton	Weight/Carton
Outer box	450 x 450 x 210 mm	1	8.8 kg

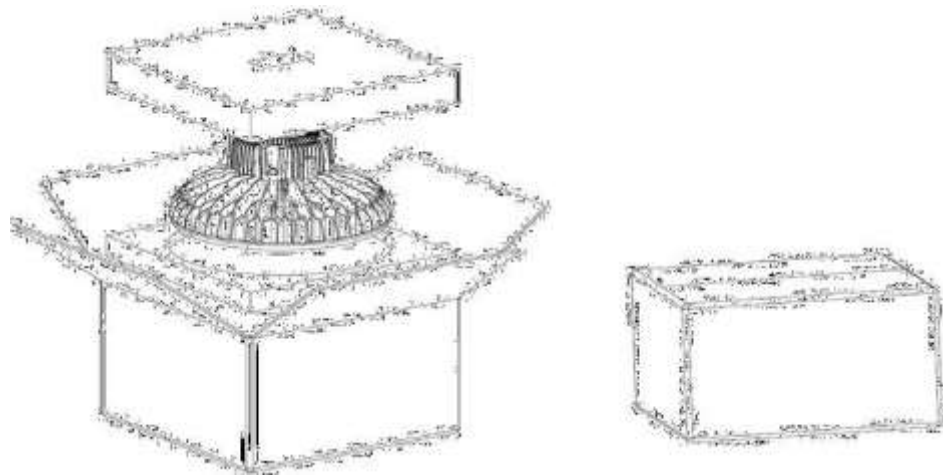

Notice For User

- ◆ Please turn off power before install or change assembly parts.
- ◆ The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- ◆ No-professionals, must not install and disassemble the lamps.

Trouble Shootings

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies
Out of working	Please check the connection