



UP AND DOWN LED WALL LIGHT SPECIFICATION

UP AND DOWN LED WALL LIGHT SPECIFICATION



FEATURES

cETLus certification

50.000hours lifetime, 3year limited warranty

Available with up& down, up only or down only

Multiple color combinations: same color for two sides,
different color for each side, mixed color for each side.

Waterproof IP65

Architectural UV resistant powder coat finish

High-quality shatter resistant glass

Sealed fixture is dirt and bug free

Available with dusk to dawn sensor

No UV rays, no noise, no flickering, mercury
free Easy installation




MAIN APPLICATIONS:

Hotel and other commercial building.

Outside wall accent
lighting: park, corridor

Parameters:

Power Consumption	2*20W	2*24W	2*36W	1*36W
Input Voltage	100-277Vac	100-277Vac	100-277Vac	100-277Vac
Certification	ETL,cETL	ETL,cETL	ETL,cETL	ETL,cETL
Warranty	1 Year	1 Year	1 Year	1 Year
IP grade	IP65	IP65	IP65	IP65
Available Color	White/Blue/Red /Purple/Green /RGB	White/Blue/Red /Purple/Green /RGB	White/Blue/Red /Purple/Green /RGB	White/Blue/Red /Purple/Green /RGB



Wattage:

40W(2 x 20W) 48W(2 x 24W)
72W(2 x 36W) 36W(1 x 36W)

Popular Color:

Cool White, Blue, Purple,,
Green, Red, RGB

Structure:




⚠WARNING⚠

WARNING:RISK OF ELECTRICAL SHOCK.TURN OFF POWER BEFORE INSTALLING,REMOVING OR INSPECTING. WARNING:ALL WIRING TO BE PERFORMED IN ACCORDANCE WITH ELECTRICAL CODE AND LOCAL ELECTRICAL CODE


WARNING:RISK OF FIRE.FIXTURES ARE RATED FOR USE IN 100-277Vac,50-60HZ PROTECTED CIRCUIT AND 90°C RATED SUPPLY WIRE.

WARNING:RISK OF CUT.THE ENCLOSED PRODUCT MAY HAVE SHARP EDGES,WEAR GLOVES TO PREVENT CUTS WHEN HANDING,REMOVING,INSTALLING AND MAINTAINING THIS PRODUCT.

Installation Steps:

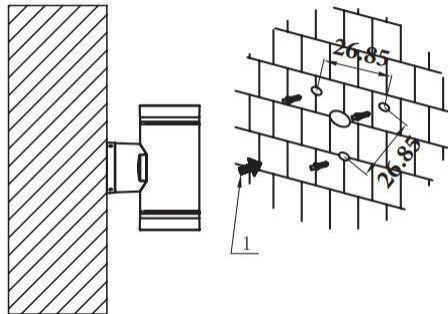


1)Drill 4 holes on the mounting surface according to the sizes shown on the above figure




2)Fix the mounting bracket on the mounting face with 4PCS self-tapping screws



Installation Guide:

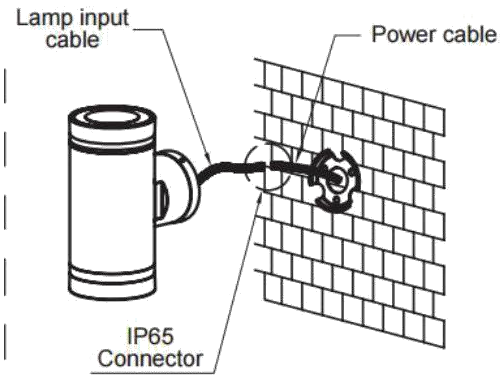

3)Connect the lamp input cable and the power cable

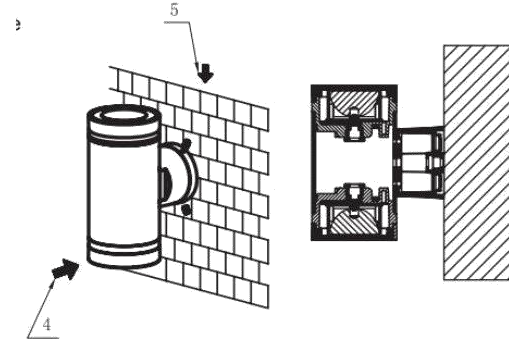

4)Fix the lamp onto mounting bracket

5)Tighten the 4PCS screws to fix the lamp housing onto the installation surface

Package:



2*20W	2*24W	2*36W	1*36W
1PCS/inner box	1PCS/inner box	1PCS/inner box	1PCS/inner box
4PCS/carton	4PCS/carton	4PCS/carton	4PCS/carton
12.84KGS/carton	13.88KGS/carton	16.88KGS/carton	12.79KGS/carton